

FAMES Analysis in Biodiesel

1. Analytical Condition

YL 6500 Series

Oven : 60°C(2min)->10°C/min->200°C(0min)->5°C/min->240°C(10min)


Column : DB-Wax (30m*0.25mm*0.25um)

Carrier gas : He, 1ml/min Split Ratio 100:1

Injector : Capillary 250°C Detector : FID 250°C

Injection Volume : 1ul

2. Chromatogram

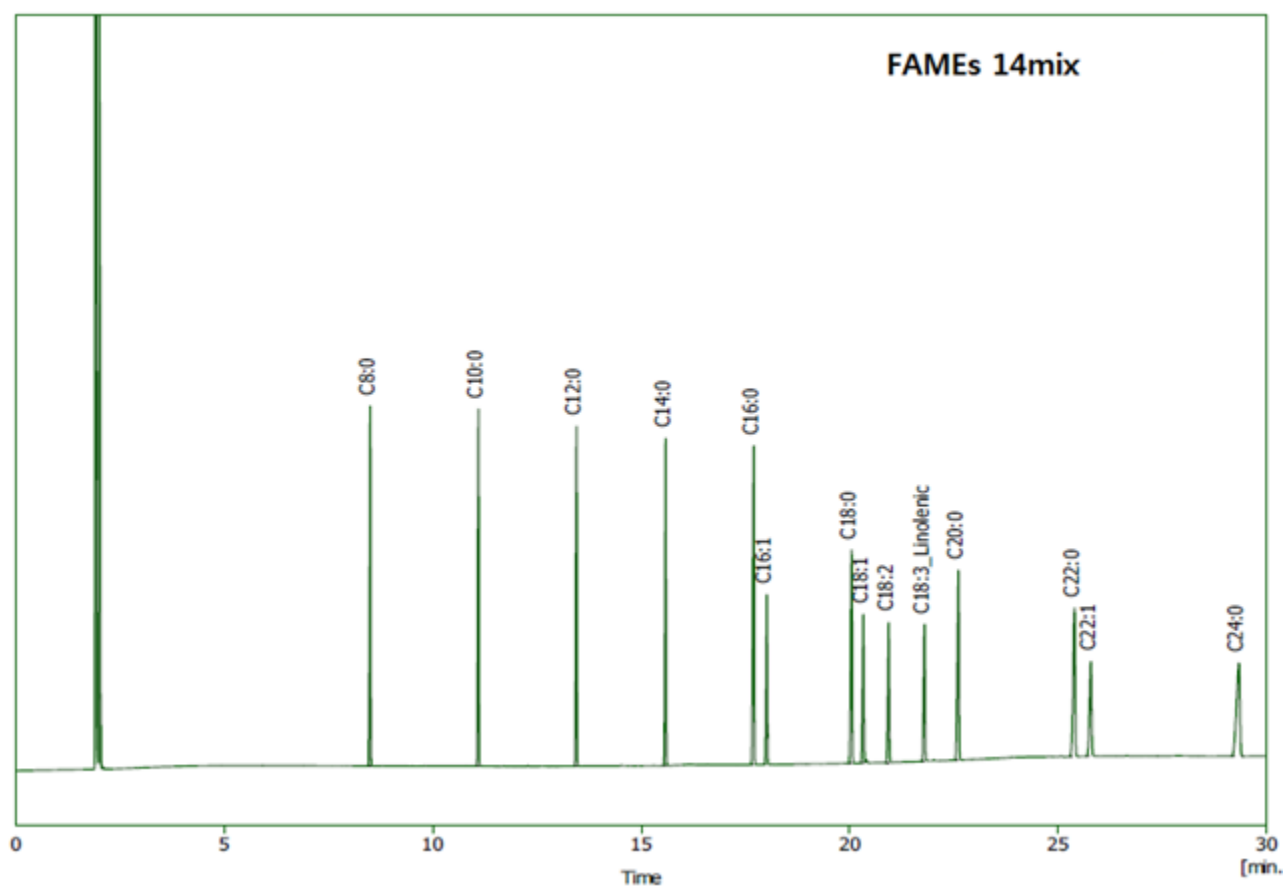

FAMES Analysis in Biodiesel

2. Chromatogram

